arXiv:1303.2819v1 [math.NT] 12 Mar 2013

ANALYSIS OF THE BINARY ASYMMETRIC JOINT SPARSE FORM

CLEMENS HEUBERGER AND SARA KROPF

Abstract. We consider redundant binary joint digital expansions of integer vectors. The redundancy is used to minimize the Hamming weight, i.e., the number of nonzero digit vectors. This leads to efficient linear combination algorithms in abelian groups, which are for instance used in elliptic curve cryptography.

If the digit set is a set of contiguous integers containing the zero, a special syntactical condition is known to minimize the weight. We analyze the optimal weight of all non-negative integer vectors with maximum entry less than N. The expectation and the variance are given with a main term and a periodic fluctuation in the second order term. Finally, we prove asymptotic normality.

1. Introduction

We deal with integer representations of vectors of integers called joint representations.

Definition 1.1. *For base 2, dimension d and a digit set $D \subseteq \mathbb{Z}$ the dimension-d* joint representation *of a vector $n \in \mathbb{Z}^d$ is a word $(\varepsilon_L \ldots \varepsilon_0)$ with $\varepsilon_i \in D^d$ and $n = \mathsf{value}(\varepsilon_L \ldots \varepsilon_0)$ with $\mathsf{value}(\varepsilon_L \ldots \varepsilon_0) = \sum_{i=0}^{L} \varepsilon_i 2^i$.*

Such representations can be used for computing a linear combination $m_1P_1 + \cdots + m_dP_d$ of points P_i of an elliptic curve, or more generally an abelian group (cf. [7]). For every nonzero digit ε_i an elliptic curve addition is performed. Since these are expensive, we want to minimize the number of nonzero digits. On the other side every nonzero column vector $\varepsilon \in D^d$ corresponds to a precomputed point. The number of doublings corresponds to the length of the expansion. Each ε_i in the expansion $(\varepsilon_L \ldots \varepsilon_0)$ is called a column vector of the expansion.

Example 1.1. A dimension-3 digit expansion with digit set $\{0, 1, 2\}$ is

$$\begin{pmatrix} 1011 \\ 0020 \\ 2001 \end{pmatrix}.$$

It is a representation of $(11, 4, 17)^T$, because

$$\begin{pmatrix} 11 \\ 4 \\ 17 \end{pmatrix} = \mathsf{value} \begin{pmatrix} 1011 \\ 0020 \\ 2001 \end{pmatrix} = \begin{pmatrix} 1 \\ 0 \\ 2 \end{pmatrix} 2^3 + \begin{pmatrix} 0 \\ 0 \\ 0 \end{pmatrix} 2^2 + \begin{pmatrix} 1 \\ 2 \\ 0 \end{pmatrix} 2^1 + \begin{pmatrix} 1 \\ 0 \\ 1 \end{pmatrix} 2^0.$$

Definition 1.2. *The* Hamming weight *$h(\varepsilon_L \ldots \varepsilon_0)$ of a digit expansion $(\varepsilon_L \ldots \varepsilon_0)$ is the number of nonzero columns $\varepsilon_i \neq 0$.*

The Hamming weight of an integer depends on the representation we use. For example, we have two representations of $3 = \mathsf{value}(3) = \mathsf{value}(11)$ with Hamming weight $h(3) = 1$ and $h(11) = 2$. But since we always use a specific digit expansion in this paper, we just write $h(n)$ for the Hamming weight of this digit expansion.

This specific digit expansion is the asymmetric joint sparse form (short AJSF) as presented by Heuberger and Muir in [5]. The digit set of this representation is $D_{l,u} = \{a \in \mathbb{Z} \mid l \leq a \leq u\}$. It

---

1991 *Mathematics Subject Classification.* 11A63; 94A60 68W40 60F05.

Key words and phrases. Redundant number systems, signed digit expansions, binary representations, joint representations, nonadjacent forms, joint sparse form, minimal weight, Hamming weight, elliptic curve cryptography, scalar multiplication, periodic fluctuation, central limit theorem.

The authors are supported by the Austrian Science Fund (FWF): P 24644-N26.

is a dimension-d joint integer representation in base 2. In [5] it has been shown that the AJSF is colexicographically minimal and has minimal Hamming weight among all representations with this digit set $D_{l,u}$.

For prior results on syntactically defined optimal digit expansions we refer to [5] and the references therein. The special case of Theorem 1 in dimension 2 and digit set $D_{-1,1}$ has been shown in [3].

We compute the expected value, the variance and the asymptotic distribution of the Hamming weight of the AJSF. The definitions and algorithms of the AJSF are recalled in Section 2. In Section 3 we construct a transducer from this algorithm. In Theorem 4 we explicitly describe this transducer to compute the Hamming weight. In Section 4 we prove the following Theorem 1 about the asymptotic normal distribution of the the Hamming weight. We use the discrete probability space $\{n \in \mathbb{Z} \mid 0 \leq n < N\}^d$ with uniform distribution as a probabilistic model, in contrast to [5] where in the "full-block-length" analysis only residue classes modulo powers of 2 have been considered.

Theorem 1. *The Hamming weight $h(m_1, \ldots, m_d)$ of the AJSF of an integer vector $(m_1, \ldots, m_d)^T$ over the digit set $D_{l,u}$ in dimension d with equidistribution of all vectors $(m_1, \ldots, m_d)^T$ with $0 \leq m_i < N$ for an integer N is asymptotically normally distributed. There exist constants $e_{l,u,d}$, $v_{l,u,d} \in \mathbb{R}$ and $\delta > 0$ depending on u, l and d such that the expected value is*

$$e_{l,u,d} \log_2 N + \Psi_1(\log_2 N) + \mathcal{O}(N^{-\delta} \log N)$$

and the variance is

$$v_{l,u,d} \log_2 N - \Psi_1^2(\log_2 N) + \Psi_2(\log_2 N) + \mathcal{O}(N^{-\delta} \log^2 N),$$

where Ψ_1 and Ψ_2 are continuous, 1-periodic functions on $\mathbb{R}$. In particular, we have

$$\mathbb{P}\left(\frac{h(m_1, \ldots, m_d) - e_{l,u,d} \log_2 N}{\sqrt{v_{l,u,d} \log_2 N}} < x\right) = \int_{-\infty}^{x} e^{\frac{-y^2}{2}} dy + \mathcal{O}\left(\frac{1}{\sqrt[4]{\log N}}\right)$$

for all $x \in \mathbb{R}$. For $d = 1$, we have

$$e_{l,u,1} = \frac{1}{w - 1 + \lambda} \text{ and } v_{l,u,1} = \frac{(3-\lambda)\lambda}{(w-1+\lambda)^3},$$

where

$$\lambda = \frac{2(u - l + 1) - (-1)^l - (-1)^u}{2^w}.$$

General formulae for $e_{l,u,d}$ for $d = 2$ are given in [5, Table 3]*. For $d \in \{1, 2, 3, 4\}$, general formulae for $e_{l,u,d}$ and $v_{l,u,d}$ are given in* [4].

In the last Section 5 we further investigate the error term of the expected value and the variance of the Hamming weight in the case of the width-w nonadjacent form. In this case $\delta = \log_2\left(1 + \frac{3\pi^2}{w^3}\right)$ for sufficiently large w, see Theorem 5.

2. Preliminaries

First, we define some properties of the digit set.

Definition 2.1. *Let $D_{l,u} = \{a \in \mathbb{Z} \mid l \leq a \leq u\}$ for $l \leq 0$ and $u \geq 1$ be the digit set. It contains $u - l + 1$ digits. The integer w is the unique integer s.t. $2^{w-1} \leq u - l + 1 < 2^w$.*

We know $w \geq 2$ because $0, 1 \in D_{l,u}$. The digit set contains at least a complete set of residues modulo 2^{w-1}. However, some residues modulo 2^w are not contained. Thus we define the following two sets:

Definition 2.2. *Let $\mathsf{unique}(D_{l,u}) = \{a \in D_{l,u} \mid u - 2^{w-1} < a < l + 2^{w-1}\}$ and $\mathsf{nonunique}(D_{l,u}) = D_{l,u} \setminus \mathsf{unique}(D_{l,u})$ be the sets which contain the unique respectively non-unique residues modulo 2^{w-1}.*

Without loss of generality we can restrict l to be greater than -2^{w-1}. Otherwise we would take the digit set $D_{-u,-l}$ where we have $-2^{w-1} < -u \leq -1$. Then every representation of a vector n of integers with digit set $D_{l,u}$ would correspond to a representation of $-n$ with digit set $D_{-u,-l}$ by changing the sign of each digit. Thereby the weight of the representation does not change.

We also consider the with-w nonadjacent form (cf. [6, 1]).

Definition 2.3. *The* width-w nonadjacent form *(short w-NAF) of an integer n is a radix-*2 *representation $(\varepsilon_L \dots \varepsilon_0)$ of n with the digit set $D_w := \{0, \pm 1, \pm 3, \dots, \pm(2^{w-1}-3), \pm(2^{w-1}-1)\}$ and the following property:*

$$\textit{If } \varepsilon_i \neq 0, \textit{ then } \varepsilon_{i+1} = \dots = \varepsilon_{i+w-1} = 0.$$

The AJSF is a generalization of the w-NAF. For dimension one only odd digits and zero are used in the AJSF. After a nonzero digit there are $w-1$ zeros. Thus, for $l = -2^{w-1}+1$ and $u = 2^{w-1}-1$ we obtain the w-NAF. This follows from Theorem 6.1 in [5].

It is known that the w-NAF representation exists and is unique for every integer (cf. [6]).

In [5] Heuberger and Muir introduce the AJSF, provide an algorithm to compute it and prove its minimality concerning colexicographic order and Hamming weight.

Theorem 2 ([5]). *Algorithm 3 in* [5] *computes the AJSF in dimension d for an integer vector n. The AJSF has minimal Hamming weight among all digit expansions of an integer vector n with digit set $D_{l,u}$.*

We present a slightly modified version of Algorithm 3 in [5] as Algorithm 1. The modification takes into account that we are only interested in the weight. Furthermore, those iterations of the while loop where the output is already predetermined are now skipped.

For simplicity we write $n + a$, for a vector n and an integer a, to denote that we add a to every coordinate of the vector n.

The **if** branch in line 3 of Algorithm 1 makes the digit at the current position a zero column if possible. If this is not possible, the **else** branch in line 6 chooses the smallest digit in each component which is congruent to the input. In the inner **if** and **else** branches the algorithm checks if we should change any non-unique digits. In the **if** statement in line 12 we check whether we can make the $(w-1)$-st digit after the current digit zero. If this is not possible we check in the **else** statement in line 17 whether we can increase the redundancy at the $(w-1)$-st digit after the current digit by changing any non-unique digits at the current position.

In the case of dimension one we can further simplify Algorithm 1. If $I_{\mathsf{unique}} \neq \emptyset$, then $I_{\mathsf{nonunique}} = \emptyset$. Thus the **else** branch in line 17 will not be processed. Algorithm 2 is the simplified version for dimension one.

3. Construction of the transducers

In this section we describe the construction of the transducers for the computation of the Hamming weight. We start with the easiest case, the w-NAF. We will then modify the ideas to deal with the asymmetric case of $D_{l,u}$-expansions in dimension 1. We finally generalize the approach to the d-dimensional $D_{l,u}$-expansions.

All transducers and automata take a (joint) binary expansion as input and read from right to left. The output of the transducers is a sequence of 0 and 1. Then the computed Hamming weight is the number of 1 in this output.

Lemma 1. *Let $w \geq 2$. The transducer in Figure 1 calculates the weight $h(n)$ of the w-NAF of an integer n.*

Proof. Let $n = \mathsf{value}(n_l \dots n_0)$ with $n_j \in \{0, 1\}$ be the standard binary expansion of n and $(\varepsilon_K \dots \varepsilon_0)$ be the w-NAF representation of n. If $n \equiv 0 \mod 2$, then $\varepsilon_0 = 0$ and we stay in the initial state. Otherwise $\varepsilon_0 \neq 0$ and the weight $h(\varepsilon_0) = 1$. Since we have a w-NAF representation, the next $w-1$ digits $\varepsilon_1 = \varepsilon_2 = \dots = \varepsilon_{w-1} = 0$, no matter what the corresponding n_j, $j = 1, \dots, w-1$ are. The sign of the digit ε_0 depends on $n_{w-1} \bmod 2$. If $n_{w-1} \equiv 0 \mod 2$, then $\varepsilon_0 > 0$ and we go to state w with the next input $\frac{n-\varepsilon_0}{2^w}$ with carry zero. If $n_{w-1} \equiv 1 \mod 2$, then

Algorithm 1 Algorithm to compute the weight of the AJSF with digit set $D_{l,u}$

```
Input: A vector of integers $n \in \mathbb{Z}^d$, integers $l \leq 0$, $u > 0$, $n \geq 0$ if $l = 0$
Output: Weight $h(n)$
$h = 0$
while $n \neq 0$ do
    if $n \equiv 0 \mod 2$ then
        $a = 0$, $h = h + 0$
        $m = \frac{n}{2}$
    else
        $a = l + ((n - l) \mod 2^{w-1})$
        $h = h + 1$
        $m = \frac{n-a}{2^{w-1}}$
        $I_{\mathsf{unique}} = \{j \in \{1, 2, \dots, d\} \mid a_j \in \mathsf{unique}(D_{l,u})\}$
        $I_{\mathsf{nonunique}} = \{j \in \{1, 2, \dots, d\} \mid a_j \in \mathsf{nonunique}(D_{l,u})\}$
        if $m_j \equiv 0 \mod 2$ for all $j \in I_{\mathsf{unique}}$ then
            for $j \in I_{\mathsf{nonunique}}$ such that $m_j$ is odd do
                $a_j = a_j + 2^{w-1}$
                $m_j = m_j - 1$
            end for
        else
            for $j \in I_{\mathsf{nonunique}}$ such that $m_j \equiv u + 1 \mod 2^{w-1}$ do
                $a_j = a_j + 2^{w-1}$
                $m_j = m_j - 1$
            end for
        end if
    end if
    $n = m$
end while
return $h$
```

Algorithm 2 Algorithm to compute the weight of the AJSF with digit set $D_{l,u}$ in dimension one

```
Input: Integers $n$, $l \leq 0$, $u > 0$, $n \geq 0$ if $l = 0$
Output: $h(n)$
$h = 0$
while $n \neq 0$ do
    if $n \equiv 0 \mod 2$ then
        $a = 0$
        $h = h + 0$
        $m = \frac{n}{2}$
    else
        $a = l + ((n - l) \mod 2^{w-1})$
        $h = h + 1$
        $m = \frac{n-a}{2^{w-1}}$
        if $m \equiv 1 \mod 2$ and $(n - l) \mod 2^{w-1} \leq u - l - 2^{w-1}$ then
            $a = a + 2^{w-1}$
            $m = m - 1$
        end if
    end if
    $n = m$
end while
return $h$
```

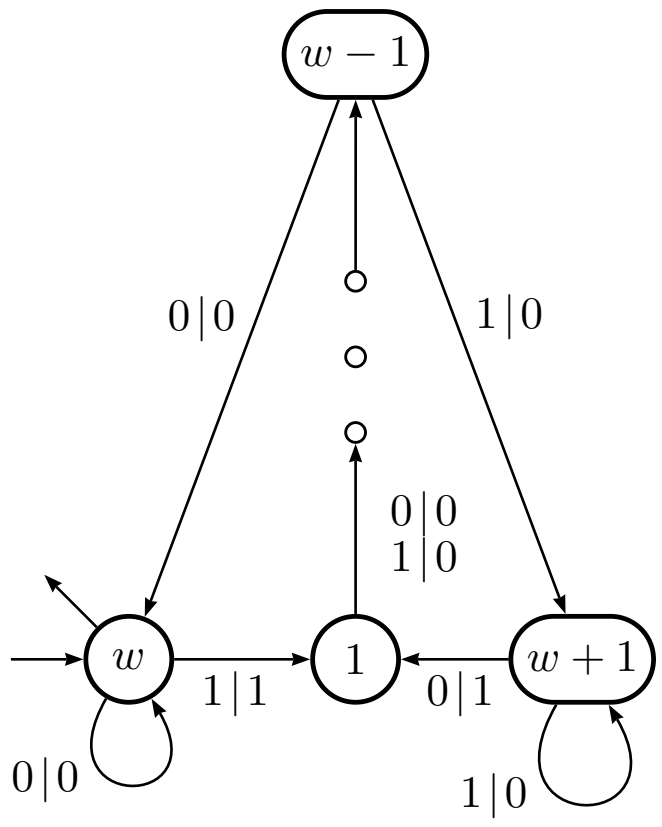

FIGURE 1. Transducer to compute the Hamming weight of a w-NAF representation.

$\varepsilon_0 < 0$ and we therefore have a carry of 1 and go to state $w+1$. There, reading an input of one and having a carry of one results in the same outcome as reading a zero, but the carry remains one. Reading an input of zero with carry one is then equivalent to reading an input of one with a carry of zero, so we are in state 1 again. □

In the next step we construct a transducer for the Hamming weight of the AJSF in dimension one. Therefore we need the following automaton to compare integers.

Lemma 2. *Automaton 2 in Figure 2 accepts the input of three integers a, b, c if and only if $a + b \leq c$. The binary expansions of a, b and c must have the same length where leading zeros are allowed.*

Proof. The states are (s, t) with $s,\ t \in \{0, 1\}$. The label s signifies the carry of the addition $a + b$ which still has to be processed. The label t corresponds to the truth value of the expression $(a + b) \bmod 2^i > c \bmod 2^i$ where i is the number of read digits up to now. So the automaton accepts the input if it stops in state $(0, 0)$ where there is no carry anymore and $a + b > c$ is false. The initial state is $(0, 0)$.

Therefore there is a path from $(0, 0)$ to (s, t) in Automaton 2 with input label

$$\begin{pmatrix} \alpha_{i-1} \dots \alpha_0 \\ \beta_{i-1} \dots \beta_0 \\ \gamma_{i-1} \dots \gamma_0 \end{pmatrix}$$

if and only if

$$s = \left\lfloor \frac{\mathsf{value}(\alpha_{i-1} \dots \alpha_0) + \mathsf{value}(\beta_{i-1} \dots \beta_0)}{2^i} \right\rfloor$$

and $t = \big[(\mathsf{value}(\alpha_{i-1} \dots \alpha_0) + \mathsf{value}(\beta_{i-1} \dots \beta_0)) \bmod 2^i > \mathsf{value}(\gamma_{i-1} \dots \gamma_0)\big]$. Here we use Iverson's notation, that is [*expression*] is 1 if *expression* is true and 0 else. From this the rules for the transitions follow. There is a transition $(s, t) \xrightarrow{(\alpha,\beta,\gamma)^T} (s', t')$ if and only if $s' = \left\lfloor \frac{\alpha+\beta+s}{2} \right\rfloor$ and $t' = [(\alpha + \beta + s) \bmod 2 > \gamma - t]$.

□

Theorem 3. *There exists a transducer with input and output alphabet $\{0, 1\}$, less than $4w - 2$ states where one state is initial and final to compute the Hamming weight of the AJSF from the binary expansion of an integer.*

Proof. We construct a transducer, doing the same calculation as Algorithm 2. It will look similar to the transducer in Figure 1. We start at some state 0. Then there is some vertical block of states with $w - 1$ rows and states $(0, 0)_i$, $(1, 0)_i$, $(0, 1)_i$ and $(1, 1)_i$ for each row $i = 1, \dots, w - 1$. After this block we either go back to state 0, or to a similar state 1, or again to the block of states

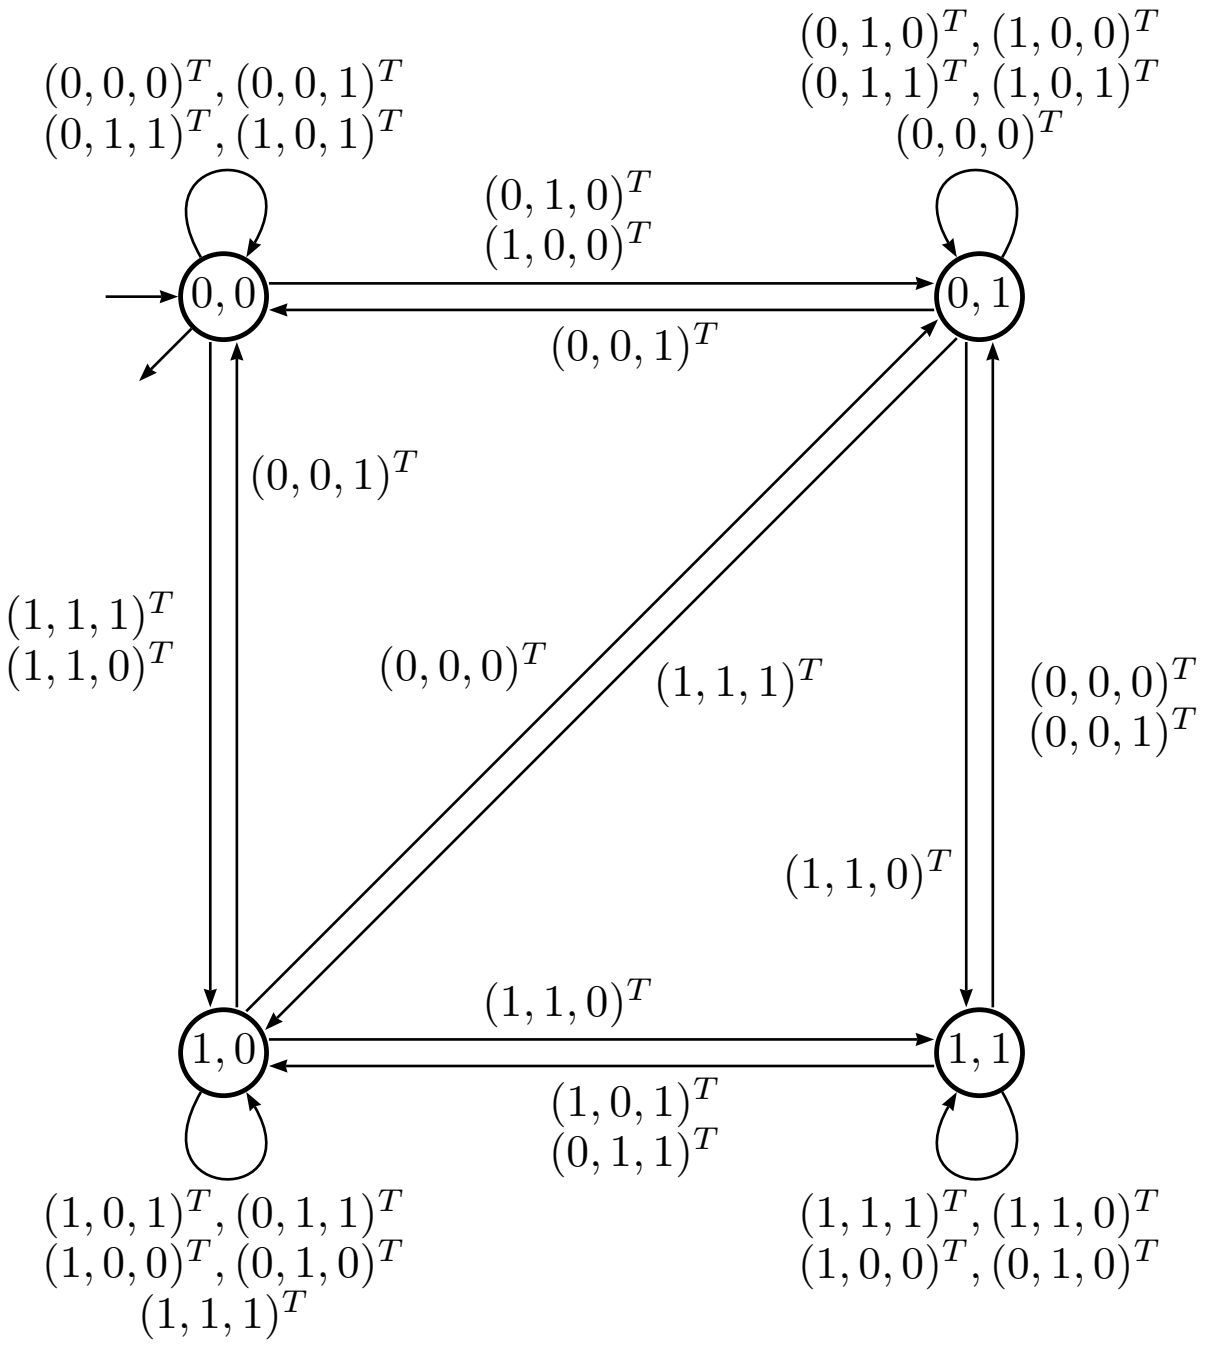

FIGURE 2. Automaton 2 to compare three integers a, b and c, accepts if $a+b \le c$.

(see Figure 3). We call the states 0 and 1 the looping states. Their labels signify the carry which is to be processed. The state 0 is also the final state.

The block of states corresponds to the **if** statement in line 11 in Algorithm 2. In this line we have to check the inequality $(n-l) \bmod 2^{w-1} \le u-l-2^{w-1}$. A first step to this aim is to compare $n+\tilde{l} \le \tilde{u}$ with $\tilde{l} := -l$ and $\tilde{u} := u-l-2^{w-1}$. Therefore we use Automaton 2.

Next we examine the binary expansions of $\tilde{u}$ and $\tilde{l}$. Since we have assumed that $l > -2^{w-1}$, we know that the length of the binary expansion of $\tilde{l}$ is at most $w-1$. Furthermore $-1 \le \tilde{u} < 2^{w-1}$. In the case $\tilde{u} = -1$ the set $\mathsf{nonunique}(D_{l,u})$ is empty and we have no choices for the digits. We will return to this case later. Then the length of the binary expansion of $\tilde{u}$ is at most $w-1$. Let $(l_{w-2} \dots l_0)$ and $(u_{w-2} \dots u_0)$ be the binary expansions of $\tilde{l}$ respectively $\tilde{u}$.

Now we can verify $n+\tilde{l} \bmod 2^{w-1} \le \tilde{u}$ by checking the label t of the state (s,t) after reading $w-1$ digits from the binary expansion of $(n, \tilde{l}, \tilde{u})^T$ in Automaton 2. If $t=0$, then the inequality is true, otherwise it is false. Since the length of $\tilde{u}$ is less than or equal $w-1$ there are no digits of $\tilde{u}$ left. Only a possible carry of the addition $n+\tilde{l}$ is left. This carry is the label s of the current state (s,t). Therefore in fact we have checked $n+\tilde{l} \bmod 2^{w-1} \le \tilde{u}$. To ensure that we read exactly $w-1$ digits, the transducer in Figure 3 has $w-1$ copies of the four states of Automaton 2. The transitions start in a state of the i-th copy and go to an appropriate state of the $(i+1)$-th copy while reading the i-th digit of the expansion.

In the **if** statement in line 11 in Algorithm 2 we have to check the other condition $m \equiv 1 \bmod 2$ too. Let $(s,t)_{w-1}$ be the current state at the end of the block of states. We know that $m = \frac{(n+\tilde{l})-(n+\tilde{l}) \bmod 2^{w-1}}{2^{w-1}}$, therefore the least significant digit of m is simply the next digit of the addition $n+\tilde{l}$. Since there are no digits of the expansion of $\tilde{l}$ left, we only have to look at the next digit ε of n and consider the carry s. Thus we have $m \equiv s+\varepsilon \mod 2$.

If the inequality of the **if** statement is satisfied, that is if $t=0$, then whatever digit ε we read next, the transducer starts from a looping state again. If m is even, then the next written digit is a zero anyway. If m is odd, we can change the digit in the representation (because it is non-unique) and m becomes even too. We only have to remember the carry. If $s=0$ or $s=1$ and we read

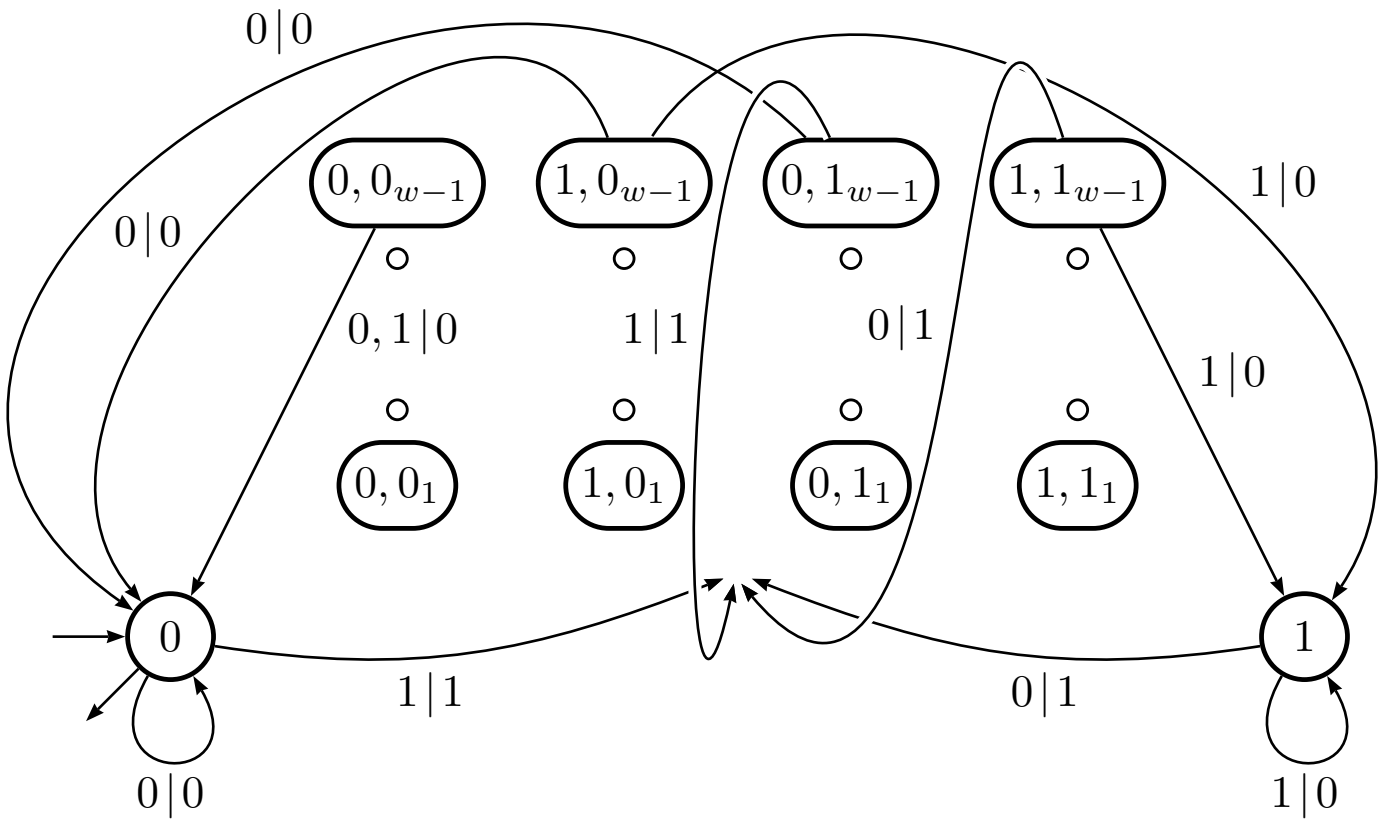

FIGURE 3. Transducer to compute the weight of the AJSF with digits in $D_{l,u}$.

$\varepsilon = 0$ then there will be no carry propagation and we continue with state 0. If $s = 1$ and we read $\varepsilon = 1$, then there is a carry propagation and we start at state 1.

If the inequality is not satisfied, that is if $t = 1$, and $m \equiv s + \varepsilon \mod 2$ is odd, then we have to start with the $w - 1$ transitions of Automaton 2 immediately. If m is even however, then the transducer starts from a looping state again. In both cases we have to consider the carry propagation as well.

At state $s \in \{0, 1\}$ we stay in state s as long as we read s. If we read $1 - s$ we start with the $w - 1$ transitions of Automaton 2.

For the case $\tilde{u} = -1$ the set $\mathsf{nonunique}(D_{l,u}) = \emptyset$. Therefore in each state $t = 1$ and the initial state of Automaton 2 has to be $(0, 1)$. Let $(u_{w-2} \dots u_0) = (0^{w-1})$. Then we have a transition from s to $(s', t')_1$ with input label $1 - s$ if and only if there is a transition from $(s, 1)$ to (s', t') with input label $(1 - s, l_0, u_0)^T$ in Automaton 2.

To summarize we have the following transitions in the transducer in Figure 3 for s, s', t, t', $\varepsilon \in \{0, 1\}$ and $i \in \{1, \dots, w - 2\}$:

- $s \xrightarrow{\varepsilon|0} s$ if $s = \varepsilon$
- $s \xrightarrow{\varepsilon|1} (s', t')_1$ if $s \neq \varepsilon$ and $(s, [\tilde{u} = -1]) \xrightarrow{(\varepsilon, l_0, u_0)^T} (s', t')$ is a transition in Automaton 2
- $(s, t)_i \xrightarrow{\varepsilon|0} (s', t')_{i+1}$ if $(s, t) \xrightarrow{(\varepsilon, l_i, u_i)^T} (s', t')$ is a transition in Automaton 2
- $(s, t)_{w-1} \xrightarrow{\varepsilon|0} s'$ if $t = 0$ or $\varepsilon + s \equiv 0 \mod 2$, and $s' = \lfloor \frac{\varepsilon + s}{2} \rfloor$
- $(s, t)_{w-1} \xrightarrow{\varepsilon|1} (s', t')_1$ if $t = 1$, $\varepsilon + s \equiv 1 \mod 2$ and $(s, [\tilde{u} = -1]) \xrightarrow{(\varepsilon, l_0, u_0)^T} (s', t')$ is a transition in Automaton 2.

We note that there is only one accessible state in the first row, because the transitions $0 \xrightarrow{1|1} (s, t)_1$ and $1 \xrightarrow{0|1} (s, t)_1$ have both the same target state. This target state depends on l and u.

Finally, we restrict the transducer to the states which are actually accessible from the initial state.

Now we can describe the last state of the path with input label $(\varepsilon_L \dots \varepsilon_0)$, a binary expansion. The following statements can be easily proved by induction. We define sequences k_i, s_i, t_i for $i \geq 0$ and a_i, f_i for $i \geq 1$, with $s_0 = 0$, $t_0 = 1$. For $\tilde{u} \geq 0$ these sequences satisfy the following

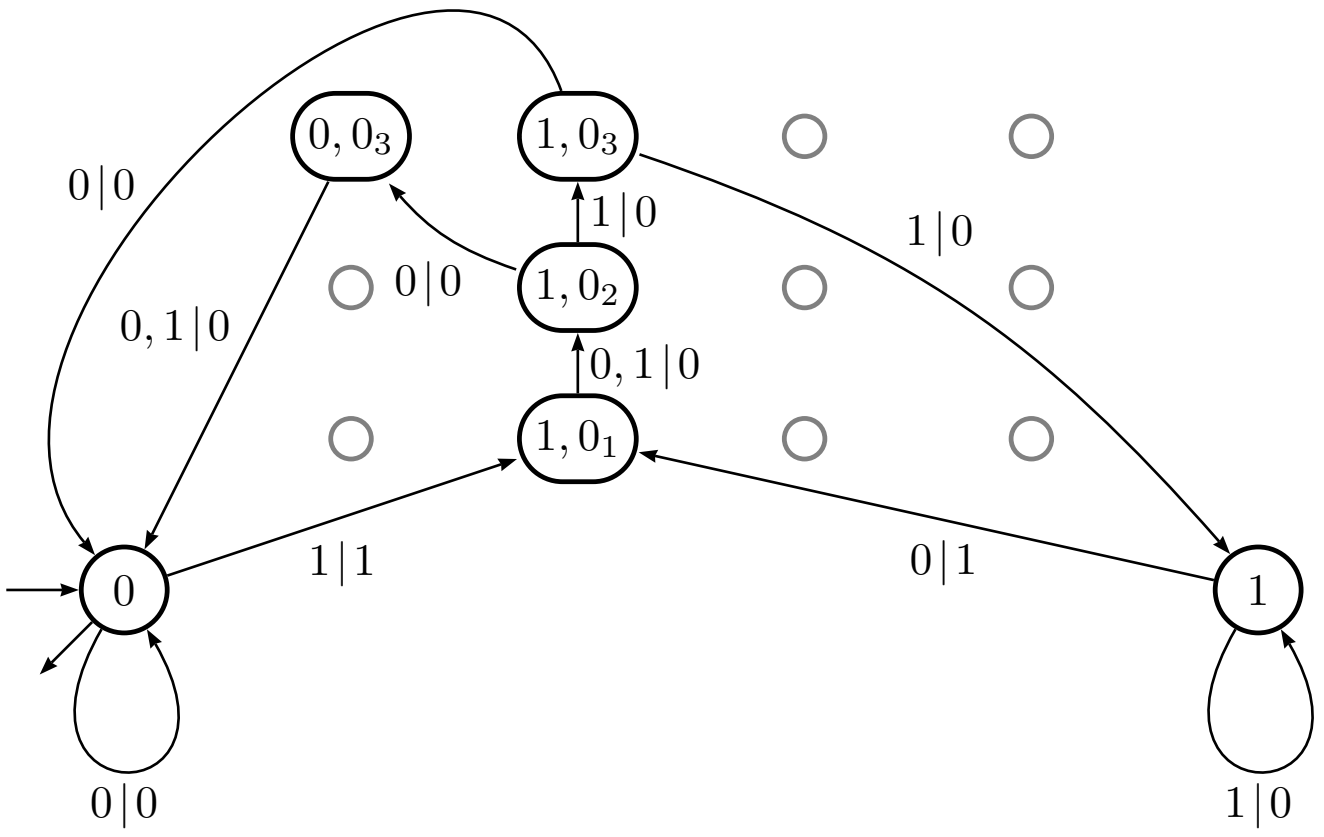

FIGURE 4. Transducer to compute the weight of the AJSF with digits in $D_{-3,11}$. The non-accessible states are gray.

recursions for $i \geq 1$:

$$k_i = \begin{cases} \max\{k \in \mathbb{N} \mid (\varepsilon_{f_i+k+w-2} \dots \varepsilon_{f_i+w-1}) = (0^{k-1}1) \text{ or } (0^k)\} & \text{if } s_i = t_i = 0, \\ \max\{k \in \mathbb{N} \mid (\varepsilon_{f_i+k+w-2} \dots \varepsilon_{f_i+w-1}) = (1^k) \text{ or } (0^k)\} & \text{if } s_i = 1,\ t_i = 0, \\ \max\{k \in \mathbb{N} \mid (\varepsilon_{f_i+k+w-2} \dots \varepsilon_{f_i+w-1}) = (0^k)\} & \text{if } s_i = 0,\ t_i = 1, \\ \max\{k \in \mathbb{N} \mid (\varepsilon_{f_i+k+w-2} \dots \varepsilon_{f_i+w-1}) = (1^k)\} & \text{if } s_i = t_i = 1, \end{cases}$$

$$f_i = k_0 + \cdots + k_{i-1} + (i-1)(w-1),$$

$$s_i = \left\lfloor \frac{\mathsf{value}(\varepsilon_{f_i+w-2} \dots \varepsilon_{f_i+1}1) + \tilde{l}}{2^{w-1}} \right\rfloor,$$

$$t_i = \left[\left(\mathsf{value}(\varepsilon_{f_i+w-2} \dots \varepsilon_{f_i+1}1) + \tilde{l} \right) \bmod 2^{w-1} > \tilde{u} \right],$$

$$a_i = -\tilde{l} + (\mathsf{value}(\varepsilon_{f_{i+1}-1} \dots \varepsilon_{f_i+1}1) + \tilde{l} \bmod 2^{k_i+w-1}).$$

The states $(s_i, t_i)_{w-1}$ are the states in the last row of the path. The integers k_i count how often we circle in a looping state after the state $(s_i, t_i)_{w-1}$. The numbers f_i are the positions of the nonzeros in the AJSF and a_i is the digit at position f_i.

Then we have

$$\mathsf{value}(\varepsilon_{f_i+w-2} \dots \varepsilon_{f_i+1}1) = a_i + 2^{w-1} s_i (1 - [s_i = 1 \wedge t_i = 0 \wedge \varepsilon_{f_i+w-1} = 0]).$$

There is a path from 0 to $(s, t)_j$ with input label $(\varepsilon_L \dots \varepsilon_0)$ if and only if, $j = L - f_i + 1$, $f_i \leq L \leq f_i + w - 2$ and

$$s = \left\lfloor \frac{\mathsf{value}(\varepsilon_L \dots \varepsilon_{f_i+1}1) + \mathsf{value}(l_{j-1} \dots l_0)}{2^j} \right\rfloor,$$

$$t = \left[(\mathsf{value}(\varepsilon_L \dots \varepsilon_{f_i+1}1) + \mathsf{value}(l_{j-1} \dots l_0)) \bmod 2^j > \mathsf{value}(u_{j-1} \dots u_0) \right].$$

There is a path from 0 to s with input label $(\varepsilon_L \dots \varepsilon_0)$ if and only if $f_i + w - 1 \leq L \leq f_{i+1} - 1$ and $s = s_i$ or $s = 0, s_i = 1$ and $(\varepsilon_L \dots \varepsilon_{f_i+w-1}) = (0^{L-f_i-w+2})$.

For $\tilde{u} = -1$ the only difference is $t_i = 1$ and $t = 1$. □

Example 3.1. For $l = -3$ and $u = 11$ we have $w = 4$, $\tilde{l} = (011)_2$ and $\tilde{u} = u - l - 2^{w-1} = (110)_2$. The transducer can be seen in Figure 4, where all non-accessible states are gray.

Now we generalize this transducer to arbitrary dimension d.

Theorem 4. *There exists a transducer to compute the Hamming weight of the AJSF for the joint binary expansion of a d-dimensional vector of integers as input. It has one state which is initial and final, input and output alphabet $\{0, 1\}$ and less than $8^d w$ states.*

Proof. We construct a transducer calculating the weight of AJSF. In order to explain the structure of this transducer, we first consider a provisional transducer implementing a simpler version of the Algorithm 1 which omits the else branch in line 17, see also the algorithm on page 306 of [5]. The resulting provisional transducer is similar to the transducer in Figure 3.

For every vector $s \in \{0,1\}^d$ there is a state. These states are called looping states. The vector s signifies the carry at each coordinate. The state $(0,\dots,0)^T$ is the initial state. Furthermore there is a block of states. The states inside the block have the labels $(s,t)_i$ where s, $t \in \{0,1\}^d$, and i is the row in the block. The coordinates of s and t have the same meaning as in the proof of Theorem 3, that is s is the carry of the addition $n+\tilde{l}$ and t signifies whether the digit is in $\mathsf{nonunique}(D_{l,u})$ or not.

If $s \in \{0,1\}^d$ is a looping state, then there is a loop with label $s \mid 0$ at this state. Because if we read $\varepsilon = s$, then we have $\varepsilon + s \equiv 0 \mod 2$, the output is 0 and the carry propagates to the next step. If we read $\varepsilon \neq s$, then we start with the $w-1$ transitions of Automaton 2 in Figure 2 in each coordinate. These $w-1$ transitions are processed independently for every coordinate. Therefore we need 4^d states in each row and $w-1$ rows to process exactly $w-1$ transitions of Automaton 2.

After the last row of the block of states we either go back to a looping state or again start with the block of states immediately. Let $(s,t)_{w-1}$ be the current state in the last row and ε the next input digit. As in the one dimensional case we have $m \equiv \varepsilon + s \mod 2$. If for every coordinate j, $t_j = 1$ implies m_j is even, then we have to process the **if** branch in line 12. We write this condition as the scalar product $t \cdot (s + \varepsilon \bmod 2) = 0$. In this case the next output digit will be zero and we go on to a looping state s' where the new carry is $s' = \lfloor \frac{s+\varepsilon}{2} \rfloor$.

If $t \cdot (s + \varepsilon \bmod 2) = 0$ does not hold, then we would have to process the **else** branch in line 17. But since we skip this part for now we simply have to restart the transducer with the input m in the case $t \cdot (s + \varepsilon \bmod 2) > 0$. We know that m is the original next input ε plus the carry s. In this case $s \neq \varepsilon$, otherwise $t \cdot (s + \varepsilon \bmod 2) > 0$ would be false. Therefore there is a transition $s \xrightarrow{\varepsilon|1} (s',t')_1$ in this transducer. This ensures that, when restarting the transducer with input m, we immediately go on to the state $(s',t')_1$. Hence we have a transition $(s,t)_{w-1} \xrightarrow{\varepsilon|1} (s',t')_1$ in the provisional transducer.

Altogether, for s, s', t, $t' \in \{0,1\}^d$, $i \in \{1,\dots w-2\}$, $j \in \{1 \dots d\}$ and $\varepsilon \in \{0,1\}^d$, we have the following transitions in this provisional transducer:

- $s \xrightarrow{\varepsilon|0} s$ if $\varepsilon = s$
- $s \xrightarrow{\varepsilon|1} (s',t')_1$ if $\varepsilon \neq s$ and $\forall j$: $(s_j, [\tilde{u} = -1]) \xrightarrow{(\varepsilon_j, l_0, u_0)^T} (s'_j, t'_j)$ is a transition in Automaton 2
- $(s,t)_i \xrightarrow{\varepsilon|0} (s',t')_{i+1}$ if $\forall j$: $(s_j, t_j) \xrightarrow{(\varepsilon_j, l_i, u_i)^T} (s'_j, t'_j)$ is a transition in Automaton 2
- $(s,t)_{w-1} \xrightarrow{\varepsilon|0} s'$ if $t \cdot (s + \varepsilon \bmod 2) = 0$ and $s' = \left\lfloor \frac{s+\varepsilon}{2} \right\rfloor$
- $(s,t)_{w-1} \xrightarrow{\varepsilon|1} (s',t')_1$ if $t \cdot (s + \varepsilon \bmod 2) > 0$ and $s \xrightarrow{\varepsilon|1} (s',t')_1$ is a transition in this transducer.

This transducer does the same as Algorithm 1 without the **else** branch in line 17. In the case $\tilde{u} = -1$ we are finished, because in the **else** branch nothing is done. Otherwise we must consider the **else** statement.

Let $(s,t)_{w-1}$ be the current state in the last row and ε be the next input digit. To process the **else** branch, $t \cdot (s + \varepsilon \bmod 2) > 0$ must hold in the state $(s,t)_{w-1}$. Otherwise we would process the **if** branch. First let us examine one coordinate j. If $t_j = 1$ nothing is done in the **else** branch, because the digit at this coordinate is unique. If $t_j = 0$, we have to decide whether $m_j \equiv u + 1 \mod 2^{w-1}$. Here $m_j \bmod 2^{w-1}$ corresponds to the next $w-1$ input digits plus the carry s_j from the current state $(s,t)_{w-1}$. So we just have to compare the input letters plus the carry with the binary expansion of $u+1 \bmod 2^{w-1}$ or, equivalently, we compare $m_j - l \bmod 2^{w-1}$ with $\tilde{v} = u - l + 1 \bmod 2^{w-1}$. If they are not the same at some point, then we just go on like we did in the provisional transducer.

If they are the same, we have to process the **else** branch. There we would have taken $m_j - 1$ as the next input of the algorithm instead of m_j. Therefore we have to decide where we would be in the provisional transducer, when starting in $(s,t)_{w-1}$ and the input is the original input minus one. This case only happens if originally the next nonzero digit is unique, but changing the current digit ensures that the next nonzero digit is non-unique. Nevertheless the next digit will not be zero, since this is the case when the **if** branch is processed. Therefore we would start in $(s,t)_{w-1}$ with original input minus one and immediately go to the block of states again. Otherwise the next digit would be zero. Thus after $w-1$ transitions we are again in a state $(s',t')_{w-1}$ in the last row. Since the next digit is non-unique, we have $t'_j = 0$.

To determine the value of s'_j we have to decide whether there is a carry at position $w-1$ in the addition of $m_j - 1$ and $\tilde{l}$. We have $m_j - 1 \bmod 2^{w-1} = u + k2^{w-1}$ for $k \in \mathbb{Z}$. Since $0 \le u \le 2^w - 1$, we have $k \in \{0, -1\}$. Then the carry is

$$\begin{aligned} s'_j &= \left\lfloor \frac{(m_j - 1) \bmod 2^{w-1} + \tilde{l} \bmod 2^{w-1}}{2^{w-1}} \right\rfloor \\ &= \left\lfloor \frac{u + \tilde{l} + k2^{w-1}}{2^{w-1}} \right\rfloor \\ &= 1 + k, \end{aligned}$$

because $2^{w-1} \le u + \tilde{l} < 2^w$. Therefore we have

$$s'_j = \begin{cases} 0 & \text{if } u \ge 2^{w-1}, \\ 1 & \text{if } u < 2^{w-1}. \end{cases}$$

As a result the state $(s',t')_{w-1}$ where we would be in the provisional transducer has

$$(\left[u < 2^{w-1}\right], 0)$$

in the j-th coordinate.

To remember that we can change the j-th coordinate at the end of the block we have to use a second identical block $\{j\}$. Let $\emptyset$ be the first block, which already exists in the provisional transducer. Let $(s,t)_i^C$ be a state in block C. At the end of block $\emptyset$ we go to block $\{j\}$ if $t \cdot (s + \varepsilon \bmod 2) > 0$ and $t_j = 0$ and else to a looping state or to the block $\emptyset$. If we find out that $m_j \not\equiv u + 1 \mod 2^{w-1}$ in block $\{j\}$, then we go back to the appropriate state in block $\emptyset$. At the end of block $\{j\}$ in the state $(s,t)_{w-1}^{\{j\}}$ we go to the same states as we would go from the state with $(\left[u < 2^{w-1}\right], 0)_{w-1}^{\emptyset}$ in the j-th coordinate.

Up to now we only considered one coordinate. Now we combine this approach for all coordinates. Since we have to remember for each coordinate whether we are allowed to change it or not, we need one block for every subset of coordinates. Let block $C \subseteq \{1, \dots, d\}$ be the block where we can change the coordinates in C. The states in block C are denoted by $(s,t,)_i^C$. The block $\emptyset$ is the block which already exists in the provisional transducer. The block $\{1, \dots, d\}$ is not accessible, since we need at least one unique coordinate and only non-unique coordinates can be changed.

If we are in block $C \neq \emptyset$ and we find out that not every coordinate $j \in C$ satisfies $m_j \equiv u + 1 \mod 2^{w-1}$, we go to the appropriate state in block $C' = C \setminus \{j \in \{1, \dots, d\} \mid m_j \not\equiv u + 1 \mod 2^{w-1}\}$. At the end of block C in state $(s,t)_{w-1}^C$ we can change the coordinates in C and all other coordinates remain the same. Therefore we go to the same states as we would go from $(\tilde{s},\tilde{t})_{w-1}^{\emptyset}$ where $\tilde{s}_j = \left[u < 2^{w-1}\right]$, $\tilde{t}_j = 0$ for $j \in C$ and all other coordinates stay the same, that is $\tilde{s}_j = s_j$ and $\tilde{t}_j = t_j$ for $j \notin C$.

Let $(v_{w-2} \dots v_0)$ be the binary expansion of $\tilde{v}$. Further let s, s', t, $t' \in \{0,1\}^d$, C, $C' \subsetneq \{1, \dots, d\}$, $j \in \{1 \dots d\}$, $i \in \{1, \dots, w-2\}$ and $\varepsilon \in \{0,1\}^d$. Then altogether there are the following transitions in the final transducer:

- $s \xrightarrow{\varepsilon|0} s$ if $s = \varepsilon$
- $s \xrightarrow{\varepsilon|1} (s',t')_1^{\emptyset}$ if $s \xrightarrow{\varepsilon|1} (s',t')_1$ is a transition in the provisional transducer
- $(s,t)_i^C \xrightarrow{\varepsilon|0} (s',t')_{i+1}^{C'}$ if $(s,t)_i \xrightarrow{\varepsilon|0} (s',t')_{i+1}$ is a transition in the provisional transducer and $C' = C \setminus \{j : s_j + \varepsilon_j + l_i \bmod 2 \neq v_i\}$

- $(s,t)^{\emptyset}_{w-1} \xrightarrow{\varepsilon|0} s'$ if $t \cdot (s+\varepsilon \bmod 2) = 0$ and $s' = \left\lfloor \frac{s+\varepsilon}{2} \right\rfloor$
- $(s,t)^{\emptyset}_{w-1} \xrightarrow{\varepsilon|1} (s',t')^{C'}_{1}$ if $t \cdot (s+\varepsilon \bmod 2) > 0$, $(s,t)_{w-1} \xrightarrow{\varepsilon|1} (s',t')_1$ is a transition in the provisional transducer and $C' = \{j : s_j + \varepsilon_j + l_0 \bmod 2 = v_0 \text{ and } t_j = 0\}$
- $(s,t)^{C}_{w-1} \xrightarrow{\varepsilon|1} (s',t')^{C'}_{1}$ if $C \neq \emptyset$ and $(\tilde{s},\tilde{t})^{\emptyset}_{w-1} \xrightarrow{\varepsilon|1} (s',t')^{C'}_{1}$ is a transition in this transducer with $\tilde{s}_j = \left[u < 2^{w-1}\right]$, $\tilde{t}_j = 0$ for $j \in C$ and $\tilde{s}_j = s_j$, $\tilde{t}_j = t_j$ for $j \notin C$
- $(s,t)^{C}_{w-1} \xrightarrow{\varepsilon|0} s'$ if $C \neq \emptyset$ and $(\tilde{s},\tilde{t})^{\emptyset}_{w-1} \xrightarrow{\varepsilon|0} s'$ is a transition in this transducer with $\tilde{s}_j = \left[u < 2^{w-1}\right]$, $\tilde{t}_j = 0$ for $j \in C$ and $\tilde{s}_j = s_j$, $\tilde{t}_j = t_j$ for $j \notin C$.

Finally, we restrict the transducer to the states which are actually accessible from the initial state.

It is possible to define similar sequences as in the proof of Theorem 3, but since it requires more than one page, we omit it here. □

Example 3.2. In Figure 5 there is a sketch of the transducer computing the weight of the AJSF over $D_{-2,3}$ in dimension two. The labels of the transitions are omitted in the figure and the transitions going back at the end of a block or inside a block are gray. We have $w = 3$, $\tilde{u} = (01)$, $\tilde{l} = (10)$ and $\tilde{v} = (10)$.

For example the state $\begin{pmatrix} 01 \\ 11 \end{pmatrix}^{\{2\}}_{2}$ has transitions to the same states as the state $\begin{pmatrix} 01 \\ 10 \end{pmatrix}^{\emptyset}_{2}$ since $u < 2^{w-1}$.

4. Proof of Theorem 1

This section contains the the proof of Theorem 1 which is a generalization of Theorem 6 in [3]. With the transducer in Theorem 4 we can compute the asymptotic Hamming weight. Therefore we use the following lemma which can be proven by induction on L.

Lemma 3. *Let A_0, A_1 be matrices in $\mathbb{C}^{n\times n}$, $H : \mathbb{N} \to \mathbb{C}^{n\times n}$ be any function and $G : \mathbb{N} \to \mathbb{C}^{n\times n}$ be a function which satisfies the recurrence relation*

$$G(2N+\varepsilon) = A_\varepsilon G(N) + \varepsilon H(N)$$

for $N \geq 1$ and $\varepsilon \in \{0,1\}$. Then

$$G\left(\sum_{l=0}^{L} \varepsilon_l 2^l\right) = \sum_{l=0}^{L} \varepsilon_l \left(\prod_{j=0}^{l-1} A_{\varepsilon_j}\right) H\left(\sum_{j=l+1}^{L} \varepsilon_j 2^{j-l-1}\right)$$

where we additionally set $H(0) = G(1)$.

We define $f(m_1,\dots,m_d) := e^{ith(m_1,\dots,m_d)}$. The matrices $M_{\varepsilon_1,\dots,\varepsilon_d}$ for $\varepsilon_i \in \{0,1\}$ are defined as follows: The (k,l)-th entry of the matrix $M_{\varepsilon_1,\dots,\varepsilon_d}$ is e^{ith} if there is a transition from state k to l with input label $(\varepsilon_1,\dots,\varepsilon_d)^T$ and output label h. The entry is 0 if there is no transition from state k to l with this input label. The ordering of the states is considered to be fixed in such a way that the initial state is the last state. Then we have

$$f(m_1,\dots,m_d) = v^T \prod_{l=0}^{L} M_{m_{1,l},\dots,m_{d,l}} M^{4w}_{0,\dots,0} v \tag{1}$$

for $v^T = (0,\dots,0,1)$ and $m_i = \sum_{l=0}^{L} m_{i,l} 2^l$. The product describes all possible paths from any state to any other state, using edges with input labels corresponding to the input $(m_1,\dots,m_d)$. The exponent of the entries of the matrix product is the sum of output labels on this paths. Since we are interested in paths starting and ending in state $(0,\dots,0)^T$, we multiply by v^T from the left and v from the right. The factor $M^{4w}_{0,\dots,0}$ ensures that all carries are processed.

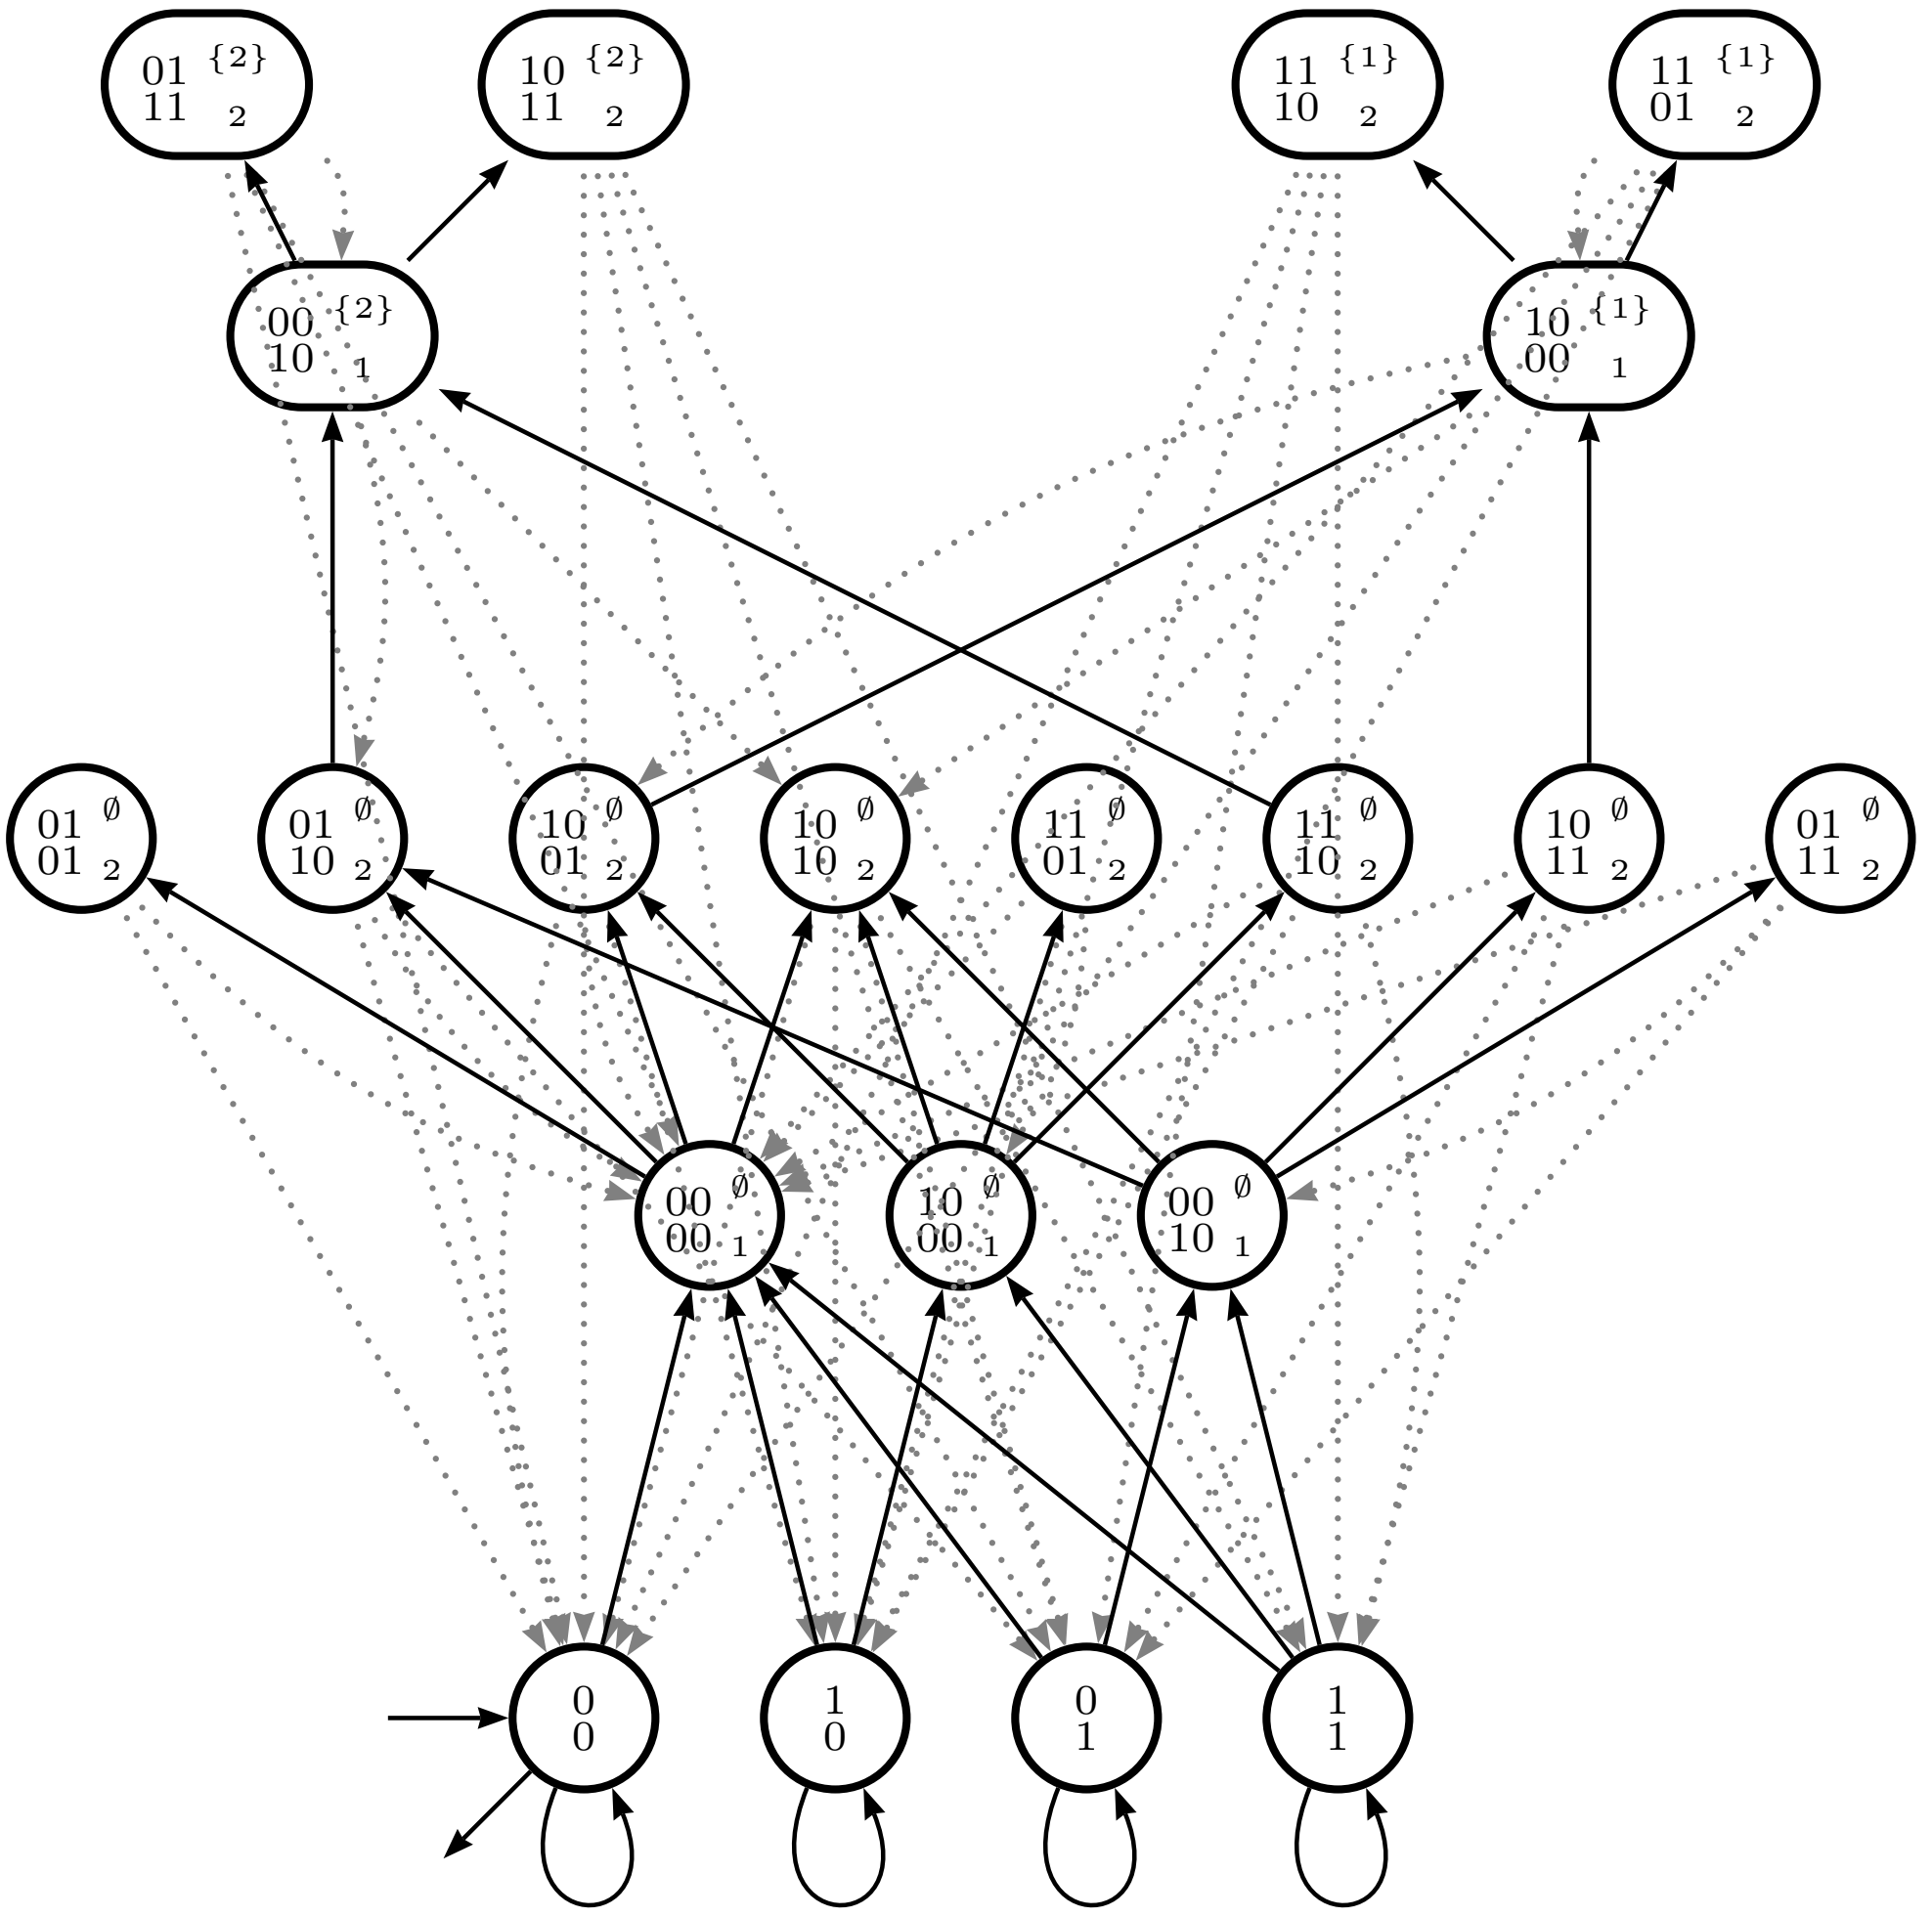

FIGURE 5. Transducer to compute the Hamming weight of the AJSF in dimension two over the digit set $D_{-2,3}$.

We further define the following summatory functions

$$E(N) = \sum_{0 \le m_1, \ldots, m_d < N} f(m_1, \ldots, m_d)$$

$$F(N) = \sum_{0 \le m_1, \ldots, m_d < N} M(m_1, \ldots, m_d),$$

with

$$M(m_1, \ldots, m_d) = \prod_{l=0}^{L} M_{m_{1,l}, \ldots, m_{d,l}}.$$

The function $M(m_1, \ldots, m_d)$ is 2-multiplicative (cf. [2]). By (1), we have

$$E(N) = v^T F(N) M_{0,\ldots,0}^{4w} v.$$

To write down a recursion formula for $F(N)$, we need the following matrices

$$B_{C,D} := \sum_{\substack{\varepsilon_i = 0,1 \\ i \notin C \cup D}} \sum_{\substack{\varepsilon_i = 0 \\ i \in C}} \sum_{\substack{\varepsilon_i = 1 \\ i \in D}} M_{\varepsilon_1, \ldots, \varepsilon_d}$$

for disjoint C, $D \subseteq \{1, \ldots, d\}$. The first index C of $B_{C,D}$ is the set of coordinates where the digit is zero. The second index D is the set of coordinates where the digit is one. All other coordinates in $(C \cup D)^c$ can be any digit. By construction, we have $\|M_{\varepsilon_1,\dots,\varepsilon_d}\|_1 = 1$, where $\| \cdots \|_1$ denotes the row sum norm of a matrix. We conclude that $\|B_{C,D}\|_1 \le 2^{d-|C|-|D|}$. As a special matrix we define $A = B_{\emptyset,\emptyset}$.

Furthermore we define the functions

$$G_C(N) := \sum_{\substack{0 \le m_i < N \\ i \notin C}} \sum_{\substack{m_i = N \\ i \in C}} M(m_1, \dots, m_d)$$

for every set $C \subseteq \{1, \dots, d\}$.

Then we have $F(N) = G_\emptyset(N)$ and the functions satisfy the following recursion formulas due to 2-multiplicativity

$$\begin{aligned}
G_C(2N) &= \sum_{\substack{\varepsilon_i=0,1 \\ i \notin C}} \sum_{\substack{\varepsilon_i=0 \\ i \in C}} \sum_{\substack{2m_i+\varepsilon_i<2N \\ i \notin C}} \sum_{\substack{2m_i+\varepsilon_i=2N \\ i \in C}} M(2m_1+\varepsilon_1, \dots, 2m_d+\varepsilon_d) \\
&= B_{C,\emptyset} G_C(N), \\
G_C(2N+1) &= \sum_{\substack{\varepsilon_i=0,1 \\ i \notin C}} \sum_{\substack{\varepsilon_i=1 \\ i \in C}} \sum_{\substack{2m_i+\varepsilon_i<2N+1 \\ i \notin C}} \sum_{\substack{2m_i+\varepsilon_i=2N+1 \\ i \in C}} M(2m_1+\varepsilon_1, \dots, 2m_d+\varepsilon_d) \\
&= \sum_{D \subseteq C^c} \sum_{\substack{\varepsilon_i=0,1 \\ i \notin C \cup D}} \sum_{\substack{\varepsilon_i=0 \\ i \in D}} \sum_{\substack{\varepsilon_i=1 \\ i \in C}} M_{\varepsilon_1,\dots,\varepsilon_d} \sum_{\substack{m_i<N \\ i \notin C \cup D}} \sum_{\substack{m_i=N \\ i \in C \cup D}} M(m_1, \dots, m_d) \\
&= \sum_{D \subseteq C^c} B_{D,C} G_{C \cup D}(N).
\end{aligned}$$

From this recursion we can determine $G_C(N)$ inductively, because all functions $G_{C'}$ required for computing G_C have $C' \supsetneq C$. Therefore we have the following recursion formula for $F(N) = G_\emptyset(N)$

$$F(2N+\varepsilon) = AF(N) + \varepsilon H(N)$$

for $N \ge 1$, $\varepsilon \in \{0,1\}$ and

$$H(N) = \sum_{\emptyset \ne D \subseteq \{1,\dots,d\}} B_{D,\emptyset} G_D(N).$$

If we define $H(0) = G_\emptyset(1)$, we can use Lemma 3 and get

$$F\left(\sum_{l=0}^{L} \varepsilon_l 2^l\right) = \sum_{l=0}^{L} \varepsilon_l A^l H\left(\sum_{j=l+1}^{L} \varepsilon_j 2^{j-l-1}\right). \tag{2}$$

Thereby $H(N)$ is considered to be a known function because it is a sum of functions $G_C(N)$, which are recursively known by Lemma 3.

From the definition of $G_C(N)$ we can derive the growth rates of the functions $G_C(N)$ and $H(N)$. We have $\|G_C(N)\|_1 = \mathcal{O}(N^{d-|C|})$ and $\|H(N)\|_1 = \mathcal{O}(N^{d-1})$.

Next we investigate the eigenvalues of the matrix A. We first consider the case $t = 0$. In this case, A is the adjacency matrix of the underlying graph of the transducer in Theorem 4. Therefore, it has eigenvalue 2^d with eigenvector $(1, \dots, 1)^T$. By the theorem of Perron-Frobenius, there is a unique dominant eigenvalue $\mu(0)$ of A which is easily seen to be primitive as every state is reachable from any other state in exactly $4w$ steps. As $\|A\|_1 \le 2^d$ and the largest eigenvalue is always at most $\|A\|_1$, $\mu(0) = 2^d$ is the largest eigenvalue. We denote the modulus of the second largest eigenvalue by $\beta(0)$. Since eigenvalues are continuous, for t in a suitable neighborhood of 0, A has a unique dominant eigenvalue $\mu(t)$ and the modulus $\beta(t)$ of the second largest eigenvalue fulfills $\beta(t) < |\mu(t)|$.

Now we want to split up (2) into two parts, one for the dominating eigenvalue and one for the remaining eigenvalues. Therefore let $J = T^{-1}AT$ be a Jordan decomposition of A where J has been sorted such that it has $\mu(t)$ in the upper left corner. We define $\Lambda := T\mathrm{diag}(\mu(t)^{-1}, 0, \dots, 0)T^{-1}$

and $R := T(J - \operatorname{diag}(\mu(t), 0, \dots, 0))T^{-1}$. Then $A^l = \mu^L \Lambda^{L-l} + R^l$ holds for $l \leq L$. Further we define

$$\Lambda(x_0, x_1, \dots) = \sum_{l=0}^{\infty} x_l \Lambda^l H\left(\sum_{j=0}^{l-1} x_j 2^{l-1-j}\right), \tag{3}$$

$$R\left(\sum_{l=0}^{L} \varepsilon_l 2^l\right) = \sum_{l=0}^{L} \varepsilon_l R^l H\left(\sum_{j=l+1}^{L} \varepsilon_j 2^{j-l-1}\right).$$

The function Λ is well defined on the infinite product space $\{0,1\}^{\mathbb{N}}$ because it is dominated by a geometric series. We extend Λ to be a function on $[1,2)$ by setting $\Lambda\left(\sum_{l=0}^{\infty} x_l 2^{-l}\right) := \Lambda(x_0, x_1, \dots)$ with the standard binary expansion and choosing the representation ending on 0^ω in the case of ambiguity.

Then we have

$$F\left(\sum_{l=0}^{L} \varepsilon_l 2^l\right) = \mu^L \Lambda(\varepsilon_L, \varepsilon_{L-1}, \dots, \varepsilon_0, 0^\omega) + R(\varepsilon_L, \dots, \varepsilon_0)$$

and

$$E(N) = \mu(t)^{\log_2 N} \Psi(\log_2 N, t) + \tilde{R}(N, t),$$

with $\Psi(x,t) = \mu(t)^{-\{x\}} v^T \Lambda(2^{\{x\}}) M_{0,\dots,0}^{4w} v$ and $\tilde{R}(N,t) = v^T R(N) M_{0,\dots,0}^{4w} v$. Furthermore there is a $0 < \delta \leq 1$ such that $\log_2 \beta(t) < d - \delta$ in a suitable neighborhood of 0. Then we have

$$|\tilde{R}(N,t)| = \mathcal{O}(N^{d-\delta}).$$

So we have

$$E(N) = N^{d + a_1 t + a_2 t^2 + \mathcal{O}(t^3)} \Psi(\log_2 N, t) + \mathcal{O}(N^{d-\delta}) \tag{4}$$

with a_1 and a_2 depending on the Taylor expansion of $\log_2 \mu(t)$ at $t = 0$. If we insert $t = 0$ in (4), we obtain $\psi_0 = \Psi(\log_2 N, 0) = 1 + \mathcal{O}\left(N^{-\delta}\right)$.

The function $\Psi(x,t)$ is periodic in x with period 1 and is well defined for all $x \in \mathbb{R}^+$. To prove continuity in x we first note that continuity for $x \in \mathbb{R}$ with $x = \log_2 y$ where y is not a dyadic rational follows from (3). To prove it for $x = \log_2 y$ with $y = \sum_{l=1}^{L} \varepsilon_l 2^{-l}$ a dyadic rational, we observe that the two one-sided limits exist due to (3). Next we prove that they are the same. Therefore we look at the two sequences $N_k = y 2^{L+k+1} + 2^k$ and $\tilde{N}_k = y 2^{L+k+1} + 2^k - 1$. Then

$$\lim_{k\to\infty} 2^{\{\log_2 N_k\}} = (\varepsilon_1 \mathbin{\bullet} \varepsilon_2 \dots \varepsilon_L 10^\omega) \text{ and } \lim_{k\to\infty} 2^{\{\log_2 \tilde{N}_k\}} = (\varepsilon_1 \mathbin{\bullet} \varepsilon_2 \dots \varepsilon_L 01^\omega).$$

If we insert these two sequences in (4) we get

$$\mathcal{O}(N_k^{d-1}) = E(N_k) - E(\tilde{N}_k) = N_k^d \Psi(\log_2 N_k, t) - \tilde{N}_k^d \Psi(\log_2 \tilde{N}_k, t) + \mathcal{O}(N_k^{d-\delta}),$$

and hence $\lim_{k\to\infty} \Psi(\{\log_2 N_k\}, t) = \lim_{k\to\infty} \Psi(\{\log_2 \tilde{N}_k\}, t)$. Therefore $\Psi(x,t)$ is continuous in x.

In t, $\Psi(x,t)$ is also continuous, because the eigenvalues of a matrix are continuous. Furthermore the function $\Psi(x,t)$ is arbitrarily often differentiable in t, because it is dominated by a geometric series. By the same argument as above, these derivatives are continuous in x.

The first and second derivative of $E(N)$ with respect to t at $t = 0$ imply that the expected value of the Hamming weight is

$$\frac{1}{N^d} \sum_{m_i < N} h(m_1, \dots, m_d) = e_{l,u,d} \log_2 N + \Psi_1(\log_2 N) + \mathcal{O}(N^{-\delta} \log N)$$

with $e_{l,u,d} = -ia_1 \log 2$ and $\Psi_1(\log_2 N) = -i\frac{\partial}{\partial t}\Psi(\log_2 N, t)|_{t=0}$, and

$$\frac{1}{N^d}\sum_{m_i<N} h^2(m_1,\ldots,m_d) = v_{l,u,d}\log_2 N + e_{l,u,d}^2\log_2^2 N + 2e_{l,u,d}\log_2 N\Psi_1(\log_2 N) + \Psi_2(\log_2 N) + \mathcal{O}(N^{-\delta}\log^2 N)$$

with $v_{l,u,d} = -2a_2\log 2$ and $\Psi_2(\log_2 N) = -\frac{\partial^2}{\partial t^2}\Psi(\log_2 N, t)|_{t=0}$. From that we calculate the variance, which is

$$\frac{1}{N^d}\sum_{m_i<N} h^2(m_1,\ldots,m_d) - \left(\frac{1}{N^d}\sum_{m_i<N} h(m_1,\ldots,m_d)\right)^2 = v_{l,u,d}\log_2 N - \Psi_1^2(\log_2 N) + \Psi_2(\log_2 N) + \mathcal{O}(N^{-\delta}\log^2 N).$$

We first compute the characteristic function $\hat{g}_N(t)$ of the random variable

$$Z = \frac{h(m_1,\ldots,m_d) - e_{l,u,d}\log_2 N}{\sqrt{v_{l,u,d}\log_2 N}},$$

which is

$$\begin{aligned}\hat{g}_N(t) &= \frac{1}{N^d}\sum_{m_i<N} e^{it\frac{h(m_1,\ldots,m_d)-e_{l,u,d}\log_2 N}{\sqrt{v_{l,u,d}\log_2 N}}}\\ &= e^{\frac{-t^2}{2}}\left(1+\mathcal{O}\left(\frac{t^3}{\log^{3/2} N}\right)\right)\psi\left(\log_2 N, \frac{t}{\sqrt{v_{l,u,d}\log_2 N}}\right)\\ &\quad + \frac{1}{N^d}\tilde{R}\left(N, \frac{t}{\sqrt{v_{l,u,d}\log_2 N}}\right)e^{-it\frac{e_{l,u,d}}{\sqrt{v_{l,u,d}}}\sqrt{\log_2 N}}.\end{aligned}$$

Since $\hat{g}_N(t)$ is a characteristic function we have $1 = \psi_0 + r_0$ for $r_0 = \frac{1}{N^d}\tilde{R}(N,0)$ and $\psi_0 = \Psi(\log_2 N, 0)$. We know that $\frac{1}{N^d}\tilde{R}(N,t) = \mathcal{O}(N^{-\delta})$. Next we can estimate the difference from $\hat{g}_N(t)$ to the characteristic function $\hat{f}(t) = e^{-\frac{t^2}{2}}$ of the normal distribution with mean 0 and variance 1, which is

$$\begin{aligned}|\hat{g}_N(t) - \hat{f}(t)| &= \Bigg| e^{-\frac{t^2}{2}}\left(1+\mathcal{O}\left(\frac{t^3}{\log^{3/2} N}\right)\right)\left(\psi_0 + \mathcal{O}\left(\frac{t}{\sqrt{\log N}}\right)\right)\\ &\quad + \frac{1}{N^d}\tilde{R}\left(N, \frac{t}{\sqrt{v_{l,u,d}\log_2 N}}\right)\exp\left(-it\frac{e_{l,u,d}}{\sqrt{v_{l,u,d}}}\sqrt{\log_2 N}\right) - (\psi_0 + r_0)e^{-\frac{t^2}{2}}\Bigg|\\ &= \mathcal{O}\left(\frac{t}{\sqrt{\log N}}\right),\end{aligned}$$

for $t = o(\sqrt{\log N})$.

Therefore the Berry-Esseen inequality [8] implies

$$\mathbb{P}\left(\frac{h(m_1,\ldots,m_d) - e_{l,u,d}\log_2 N}{\sqrt{v_{l,u,d}\log_2 N}} < x\right) = \frac{1}{\sqrt{2\pi}}\int_{-\infty}^{x} e^{-\frac{y^2}{2}}dy + \mathcal{O}\left(\frac{1}{\sqrt[4]{\log N}}\right).$$

For a specific digit set and dimension we can compute the constants $e_{l,u,d}$ and $v_{l,u,d}$ explicitly.

Example 4.1. We have the digit set $D_{-2,3}$ in dimension two. See Example 3.2 and Figure 5 for the transducer. The adjacency matrix A of the underlying graph of this transducer is

$$A = \begin{pmatrix}
0 & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\
3z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\
z & 0 & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 \\
z & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\
2z & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\
z & 0 & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 \\
z & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\
2z & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\
z & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 \\
z & 0 & 0 & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\
z & z & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\
2z & 0 & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\
2z & z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\
3z & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1
\end{pmatrix},$$

where $z = e^{it}$.

The characteristic polynomial of A is

$$-(x-1)x^7\left(x^2-2z\right)\left(x^3-x^2-xz-2z\right)^2\left(x^5-x^4-7x^3z-20x^2z+6xz^2-24z^2\right).$$

At $t = 0$ the dominating eigenvalue $\mu(0) = 4$ is a root of the fourth factor. Therefore the Taylor expansion of $\mu(t)$ around $t = 0$ is

$$\mu(t) = 4 + \frac{128i}{89}t - \frac{673216}{2114907}t^2 + \mathcal{O}(t^3).$$

Hence the expected value of the weight is

$$\frac{32}{89}\log_2 N + \mathcal{O}(1)$$

and the variance is

$$\frac{63200}{2114907}\log_2 N + \mathcal{O}(1).$$

In order to determine the constants $e_{l,u,d}$ and $v_{l,u,d}$ giving mean and variance in general, we rephrase the results of the "full-block-length" analysis in [5] in a probability model which is easily compared with our main results.

Lemma 4. *Let $k \geq w$ be a positive integer. Let $\widetilde{W_k}$ be the Hamming weight of the AJSF of a random vector $m = (m_1, \dots, m_d)^T$ with equidistribution of all vectors $m = (m_1, \dots, m_d)^T$ with $0 \leq m_i < 2^k$.*

Then

$$\mathbb{E}\widetilde{W_k} = e_{l,u,d}k + \mathcal{O}(1) \text{ and } \mathbb{V}\widetilde{W_k} = v_{l,u,d}k + \mathcal{O}(\sqrt{k})$$

for the constants given in Theorem 1.

Proof. For $j < k$, we denote the j-th digit of the AJSF of a random vector $m = (m_1, \dots, m_d)^T$ by $\widetilde{X}_j$, where we assume equidistribution of all vectors $m = (m_1, \dots, m_d)^T$ with $0 \leq m_i < 2^k$.

In [5, § 6.2], the random variables X_j denoting the j-th digit of a random AJSF has been considered, where the probability measure was defined to be the image of the Haar measure on the space of d-tuples of 2-adic integers under the AJSF, i.e., equidistribution on all residue classes modulo 2^l for all l has been assumed. Furthermore, W_j was defined to be the weight of the first j digits.

From Algorithm 1 it is clear that $\widetilde{X}_j$ only depends on m modulo 2^{j+w}. This implies that $\widetilde{X}_j$ and X_j are identically distributed for $j < k - w$. Therefore W_{k-w} and $\widetilde{W}_{k-w}$ are identically distributed, too. Furthermore, we always have $|\widetilde{W}_k - \widetilde{W}_{k-w}| \leq w$.

By [5, Theorem 6.7], we have

$$\mathbb{E}\widetilde{W}_{k-w} = \mathbb{E}W_{k-w} = e_{l,u,d}(k-w) + \mathcal{O}(1) \text{ and } \mathbb{V}\widetilde{W}_{k-w} = \mathbb{V}W_{k-w} = v_{l,u,d}(k-w) + \mathcal{O}(1).$$

We conclude that

$$\begin{aligned}\mathbb{E}\widetilde{W}_k &= \mathbb{E}\widetilde{W}_{k-w} + \mathcal{O}(1) = \mathbb{E}W_{k-w} + \mathcal{O}(1) = e_{l,u,d}k + \mathcal{O}(1),\\ \mathbb{V}\widetilde{W}_k &= \mathbb{V}\widetilde{W}_{k-w} + \mathbb{V}(\widetilde{W}_k - \widetilde{W}_{k-w}) + 2\operatorname{Cov}(\widetilde{W}_{k-w}, \widetilde{W}_k - \widetilde{W}_{k-w}) = \mathbb{V}W_{k-w} + \mathcal{O}(\sqrt{k}),\end{aligned}$$

where the Cauchy-Schwarz inequality has been used in the form

$$\operatorname{Cov}(\widetilde{W}_{k-w}, \widetilde{W}_k - \widetilde{W}_{k-w}) \leq \sqrt{\mathbb{V}\widetilde{W}_{k-w}\mathbb{V}(\widetilde{W}_k - \widetilde{W}_{k-w})}.$$

□

5. Asymptotic distribution of the w-NAF

In this section we specialize the result of Theorem 1 to the w-NAF.

Theorem 5. *The weight $h(n)$ of the w-NAF of the integer n with equidistribution on $\{n \in \mathbb{Z} \mid 0 \leq n < N\}$ is asymptotically normally distributed. There exists a $\delta > 0$ such that the mean is*

$$\frac{1}{w+1}\log_2 N + \Psi_1(\log_2 N) + \mathcal{O}(N^{-\delta}\log N)$$

and the variance is

$$\frac{2}{(w+1)^3}\log_2 N - \Psi_1^2(\log_2 N) + \Psi_2(\log_2 N) + \mathcal{O}(N^{-\delta}\log^2 N),$$

where Ψ_1 and Ψ_2 are continuous, 1-periodic functions on $\mathbb{R}$. If w is large enough then $\delta = \log_2\left(1 + \frac{3\pi^2}{w^3}\right)$. In particular we have

$$\mathbb{P}\left(\frac{h(n) - \frac{\log_2 N}{w+1}}{\sqrt{\frac{2}{(w+1)^3}\log_2 N}} < x\right) = \frac{1}{\sqrt{2\pi}}\int_{-\infty}^{x} e^{-\frac{y^2}{2}}\,dy + \mathcal{O}\left(\frac{1}{\sqrt[4]{\log N}}\right)$$

for all $x \in \mathbb{R}$.

This follows from Lemma 5 and Theorem 1.

Lemma 5. *The characteristic polynomial of the matrix A of the transducer in Figure 1 is $(x-1)(x^w - x^{w-1} - 2^{w-1}e^{it})$. The largest eigenvalue $\mu(t)$ is unique around $t = 0$ and $\mu(0) = 2$. Furthermore for large enough w and $t = 0$ there is exactly one simple eigenvalue in $T_k = \{x \in \mathbb{C} : |x| \geq \frac{2}{1+\frac{3}{w}}, |\arg x - \frac{2k\pi}{w}| \leq \frac{\pi}{2w}\}$ for each $k = 0, \ldots, w-1$, and additionally the obvious eigenvalue $x = 1$. The eigenvalues with the second largest absolute value are in T_1 and T_{w-1}. For each eigenvalue at $t = 0$ an expansion in $\frac{1}{w}$ can be computed with arbitrarily small error term.*

Proof. The characteristic polynomial of A is obtained by Laplace expansion. With $z = \frac{2}{x}$ the interesting factor of the characteristic polynomial is transformed into $z^w + z - 2 = 0$. The smallest root in absolute value of this polynomial is 1, because for $|z| < 1$ we have

$$|z^w + z| = |z| \cdot |z^{w-1} + 1| < 2|z| < 2.$$

We use the fixed point equation $f_k(z) = z$ with

$$f_k(z) = (2-z)^{\frac{1}{w}} e^{\frac{2\pi i k}{w}}$$

for $k = 0, \ldots, w-1$. Here we take the main branch of the w-th root. After the substitution we have $\widetilde{T}_k = \{z \in \mathbb{C} : |z| \le 1 + \frac{3}{w},\ |\arg z - \frac{2k\pi}{w}| \le \frac{\pi}{2w}\}$ which corresponds to $T_{-k \bmod w}$. For w large enough and $|z| \le 1 + \frac{3}{w}$ we have

$$\begin{aligned} |f_k'(z)| &= \frac{1}{w}|2-z|^{\frac{1}{w}-1} \\ &\le \frac{1}{w}\left(1-\frac{3}{w}\right)^{\frac{1}{w}-1} \le \frac{1}{w-3} \end{aligned}$$

and

$$\begin{aligned} |f_k(z)| &\le |f_k(z) - f_k(1)| + |f_k(1)| \\ &\le \frac{1}{w-3}|z-1| + 1 \le \frac{2+\frac{3}{w}}{w-3} + 1 \le 1 + \frac{3}{w}. \end{aligned}$$

Furthermore $|\arg f_k(z) - \frac{2k\pi}{w}| \le \frac{\pi}{2w}$. Thus $f_k(\widetilde{T}_k) \subseteq \widetilde{T}_k$ and f_k is a contraction on $\widetilde{T}_k$ with Lipschitz constant $(w-3)^{-1} < 1$. Therefore there exists a unique fixed point of f_k in $\widetilde{T}_k$ for each k. Because $\widetilde{T}_k$ for $k = 0, \ldots, w-1$ only intersect in 0, which is certainly no root of the polynomial, we found w distinct roots of the polynomial $z^w + z - 2$, so we found all roots of this polynomial. We only have to investigate $0 \le k \le \frac{w}{2}$ because the coefficients of the polynomial are real. Let $z \in \widetilde{T}_k$ be the fixed point of f_k. For $\rho = \exp(\frac{2\pi i}{w})$ we have $|z - \rho^k| = \mathcal{O}(\frac{1}{w})$. Therefore $z = \rho^k + \mathcal{O}(\frac{1}{w})$.

For $k \le w^\alpha$ with a fixed $\frac{1}{2} < \alpha < 1$ we have

$$z = f(z) = 1 + \frac{2\pi i k}{w} + \mathcal{O}\left(\frac{k^2}{w^2}\right).$$

Iterating, we successively get

$$\begin{aligned} z &= 1 + \frac{2\pi i k}{w} - \frac{2\pi^2 k^2}{w^2} - \frac{2\pi i k}{w^2} + \mathcal{O}\left(\frac{k^3}{w^3}\right) \quad \text{and} \\ |z| &= 1 + \frac{4\pi^2 k^2}{w^3} + \mathcal{O}\left(\frac{k^3}{w^4}\right). \end{aligned}$$

Therefore for large w only the fixed points for $k = w-1, 0, 1$ are in the the disk $\{z \in \mathbb{C} : |z| \le 1 + \frac{10\pi^2}{w^3}\}$.

For $k \ge w^\alpha$ we have

$$\begin{aligned} |2 - \rho^k| &= \left(5 - 4\cos\left(\frac{2k\pi}{w}\right)\right)^{\frac{1}{2}} \ge \left(5 - 4\cos\left(2w^{\alpha-1}\pi\right)\right)^{\frac{1}{2}} \\ &= 1 + 4\pi^2 w^{2\alpha-2} + \mathcal{O}(w^{4\alpha-4}), \\ |2 - z| &\ge |2-\rho^k| - |z - \rho^k| \\ &= 1 + 4\pi^2 w^{2\alpha-2} + \mathcal{O}(w^{4\alpha-4} + w^{-1}), \\ |f_k(z)| &= \exp\left(\frac{1}{w}\log|2-z|\right) \ge 1 + 4\pi^2 w^{2\alpha-3} + \mathcal{O}(w^{4\alpha-5} + w^{-2}). \end{aligned}$$

Thus for $k \ge w^\alpha$ the fixed point of f_k is not in the disk $\{z \in \mathbb{C} : |z| \le 1 + \frac{10\pi^2}{w^3}\}$ for large w. □

References

1. Roberto M. Avanzi, *A Note on the Signed Sliding Window Integer Recoding and a Left-to-Right Analogue*, Selected Areas in Cryptography'04, 2004, pp. 130–143.
2. Guy Barat and Peter J. Grabner, *Distribution of Binomial Coefficients and Digital Functions*, Journal of the London Mathematical Society **64** (2001), no. 3, 523–547.
3. Peter J. Grabner, Clemens Heuberger, and Helmut Prodinger, *Distribution results for low-weight binary representations for pairs of integers*, Theoretical Computer Science **319** (2004), 307 – 331.
4. Clemens Heuberger and James A. Muir, *Minimal weight and colexicographically minimal integer representations – online resources*, `http://www.math.tugraz.at/~cheub/publications/colexi/`, 2006.

5. ———, *Minimal Weight and Colexicographically Minimal Integer Representations*, Journal of Mathematical Cryptology **1** (2007), 297–328.
6. James A. Muir and Douglas R. Stinson, *Minimality and other properties of the width-w nonadjacent form*, Mathematics of Computation **75** (2006), no. 253, 369–384. MR 2176404 (2006k:94107)
7. E. Straus, *Addition chains of vectors (problem 5125)*, American Mathematical Monthly **71** (1964), 806–808.
8. Jeffrey D. Vaaler, *Some extremal functions in Fourier analysis*, Bulletin of the American Mathematical Society **12** (1985), 183–216.

Institut für Mathematik, Alpen-Adria-Universität Klagenfurt, Universitätsstrasse 65–67, 9020 Klagenfurt am Wörthersee, Austria and Institut für Optimierung und Diskrete Mathematik (Math B), TU Graz, Steyrergasse 30, 8010 Graz, Austria
E-mail address: `clemens.heuberger@aau.at`

Institut für Mathematik, Alpen-Adria-Universität Klagenfurt, Universitätsstrasse 65–67, 9020 Klagenfurt am Wörthersee, Austria
E-mail address: `sara.kropf@aau.at`